




Polairis model PLC2

Refrigerant condensers

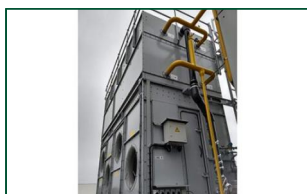

Key benefits

- Extremely reliable
- Energy efficient
- Minimal maintenance and easy inspection

POLAIRIS

Polairis characteristics

- Counter flow, radial fan, forced draft
- PED 2014/68/EU coil design

Capacity range

80 - 1580 kW
(for single cell models, nominal R717 kW's)

Typical applications

- Industrial refrigeration applications with focus on reliability, energy efficiency and minimal maintenance
- Tight enclosures and sound critical installations
- Dry operation in winter time



Extremely reliable

- The Polairis™ evaporative condenser's design incorporates all **experience** BAC acquired over the last decades with thousands of VXC units installed globally since 1978.
- Fan drive systems are located inside the unit, in the **dry air**, preventing condensation and eliminating corrosion issues and premature failures.
- Direct driven fans **eliminate potential mechanical failures**.
- Multiple, individually driven fans guarantee **redundancy**.
- [Baltibond hybrid coating](#) for maximum equipment life, with corrosion resistance equivalent to SST 304L.
- **Dry operation** possible.

Energy efficient

- Evaporative condensers yield the lowest condensing temperatures and hereby **minimize the system energy consumption**.
- Up to **50% savings** with the energy efficient radial fans, compared to standard centrifugal fans.
- EC motors have superior efficiency that exceeds the IE4 requirements. Integrated electronics of EC motors allow for **variable speed control** at a significantly **reduced power consumption** compared to AC motors with VFD.

Minimal maintenance and easy to inspect

- Direct driven fans require **no maintenance** at all.
- The [DiamondClear™ Design*](#) offers a continuous self-cleaning operation. The **need for maintenance is minimized** by using fully sloping surfaces, a constant impact of falling spray water and high water velocities.
- [Collection basin](#) covers only a fraction of the unit footprint, which makes it subject to higher turbulences. Together with the significantly lower volume (25% reduction versus conventional evaporative condensers), this **reduces the chemical usage and need for cleaning**.
- **Unmatched accessibility** to the basin, drives and fans in the dry section, via the mansized access door at ground level.
- Water distribution system is **easily accessible** from outside.
- [Baltibond hybrid coating](#) for a smooth surface finish that **facilitates internal cleaning**.

Superb hygiene

- The [DiamondClear™ Design*](#) offers a **continuous self-cleaning operation**. During standstill the sloping surfaces fully drain, avoiding stagnant water and the risk of sedimentation of impurities.
- A completely encased collection basin eliminates any sunlight ingress, **preventing biological growth**.
- [Baltibond hybrid coating](#) for a smooth surface finish that **reduces biofilm development**.
- The floor is fully sloped towards the drain - also in the dry section - for **easy cleaning**.
- Water treatment system connections are provided as standard.
- The access door is located in the dry area, **eliminating any leakage risk**.



Optimized for transport and easy installation

- **Installations costs are reduced** since units are shipped in 2 factory-built sections with a rigid base frame that guarantees squareness for easy on-site assembly.
- **Minimal freight costs** with 2,4 m wide units that fit into standard trucks.
- Fans are prewired to a terminal box to avoid time-consuming on-site wiring. Integrated electronics of EC motors eliminate the need for external VFD's, electronic filters and shielded cables.
- Single side air intake allows for **installation in confined spaces and next to solid walls**.
- Pressure capability of fans allows indoor installation with ductwork.
- Silent radial fans reduce the need for installation of sound attenuation.

Ultra silent

- **Silent radial fans** are standard.
- Single side air inlet allows directing the quiet unit rear towards **noise sensitive areas**.
- Sound attenuation is available for the most **stringent sound requirements**.

* patent pending

Interested in the Polairis condenser for your industrial refrigeration application? Contact your local [BAC representative](#) for more information.

Downloads

- [Polairis evaporative condenser](#)
- [Operating and Maintenance PLC2](#)
- [Rigging and Installation PLC2](#)
- [Spare Parts for PLC2](#)
- [Retrofit Opportunities for PLC2](#)
- [Polairis PLC](#)


Principle of operation

Refrigerant condensers

Principle of operation

Refrigerant vapour (1) circulates through an **evaporative condensing coil (2)**, which is continuously wetted by the **spray system (3)** installed at the top of the condenser. At the same time the **direct driven radial fans (4)**, located at the bottom of the unit, blow ambient **air (5)** upwards through the condenser.

During operation, heat is transferred from the refrigerant to the water, and then to the atmosphere as a portion of the water that evaporates. The condensed vapour then **exits the unit (6)**. The remaining spray water that falls on the **sloping channels (7)** continuously flows into the **sloping sump (8)**, where the water is collected. **Access louvers (9)** prevent water splash-out to the dry section. The spray water **pump (10)** recirculates the water up to the water spray system. The warm saturated **air (11)** leaves the condenser through the drift **eliminators (12)**, which remove water droplets from the air.

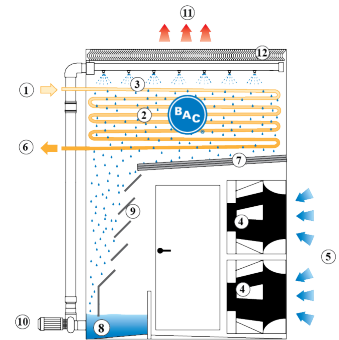

Interested in the Polairis condenser? Contact your local [BAC representative](#) for more information.



Construction details

Refrigerant condensers

Construction details


1. Material options

- The unique [Baltibond hybrid coating](#) is **standard for maximum equipment life**. This hybrid polymer coating is applied before assembly to all hot-dip galvanized steel components of the unit.
- Optional [stainless steel](#) panels and structural elements of type 304L or 316L for extreme applications.
- Or the economical alternative: a **water-contact stainless steel cold water basin**. Its key components and the basin itself are stainless steel. The rest is protected with the Baltibond hybrid coating.



2. Heat transfer media

- Our heat transfer media is a **condensing coil**. Its thermal performance is proven during comprehensive [lab thermal performance tests](#), and it offers you unrivalled system efficiency.
- The coil is constructed of continuous length prime surface steel, hot-dip galvanized after fabrication. Designed for maximum 23 bar operating pressure according to PED. Pneumatically tested at 34 bar.
- All hot dip galvanized and stainless steel coils are delivered with BAC's **Internal Coil Corrosion Protection**, to ensure an optimal internal corrosion protection and guaranteed quality.

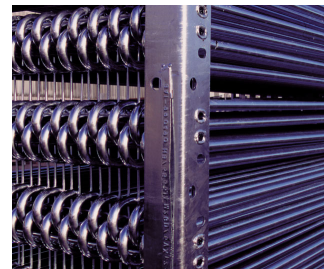

Try our Polairis coil options:

- **Extended surface coils** with selected rows, finned at 3 to 5 fins per inch and hot-dip galvanized after fabrication, for dry operation during winter time.
- **Multiple circuit coils (split coils)** for your halo carbon refrigerants, maintaining individual compressor systems. Or use it for compressor jacket water or glycol cooling.
- **Stainless steel coils** are in type 304L or 316L.
- **High pressure coils** are designed for 28 bar operating pressure and pneumatically tested for 40 bar. Hot-dip galvanized after fabrication.

All coils are designed for low pressure drop with sloping tubes for free drainage of fluid.

3. Air movement system

- The air movement system consists of **multiple, direct driven radial fans** made of aluminum, mounted on **EC motors with integrated control electronics**. They are completely **maintenance free** and guarantee **redundancy**.
- Air guiding channels installed above the fans allow a direct, vertical and **uniform air distribution** over the entire footprint of the condensing coil for **optimal heat transfer**.
- EC motors have an efficiency level that significantly **exceeds efficiency class IE4** and enable **speed control without an additional variable frequency drive** and shielded cables.
- The EC motors are wired to an IP66 terminal box, to avoid time-consuming on-site wiring.
- **Drift eliminators** come in UV-resistant plastic, which will not rot, decay or decompose and their performance is tested and **certified by Eurovent**. They are assembled in **easily handled and removable sections**, for easy inspection of the water distribution system.
- Steel drift eliminators, protected with the unique [Baltibond hybrid coating](#) for optimal corrosion protection, are also available for specific applications.



4. Water distribution system

These consist of:

- **Spray branches** with wide non-clog plastic **nozzles**, secured by rubber **grommets**. You can easily remove, clean and flush both nozzles and spray branches from outside the unit.
- A [water collection system](#) with:
 - Sloping channels that are continuously cleaned through direct impact of falling spray water, minimizing the need for maintenance
 - A sloping and free draining cold water basin with minimal surface and volume, which makes it subject to high turbulences during operation, thereby reducing the need for cleaning and chemical usage.





Options and accessories

Refrigerant condensers

Options and accessories

Below is a listing of the main Polairis options and accessories. If your required option or accessory is not listed, look no further than your [local BAC representative](#).



Sound attenuation

Reducing noise at air intake and discharge points brings us closer to silent cooling equipment.



Remote sump connection

The best way to **prevent a sump freezing** is to use the auxiliary remote variety within a heated area. Shutting off the circulating pump allows all the water in the water distribution, as well as that in suspension and the sump to drain freely to the auxiliary sump.



Basin heater package

Thanks to our factory-installed heaters, the water stays at 4°C and **never freezes**, even during equipments downtime and however cold it gets outside.



Electric water level control package

For **perfectly precise water level control**, replace the standard mechanical valve with our electrical water level controller.



Platforms

To inspect and maintain from the top of the unit more **easily** and **safely**, platforms can be installed.



Ladder, safety cage and handrail

A ladder, safety cage and handrails **all facilitate access to the top of the unit** and safe inspection of your condenser.




Discharge hood

Discharge hoods **reduce the risk of re-circulation** in tight enclosures by increasing discharge air velocity, and can be used to elevate the unit discharge above adjacent walls to comply with layout guidelines.



Standby pump

Install a standby **reserve spray pump** as failure backup!

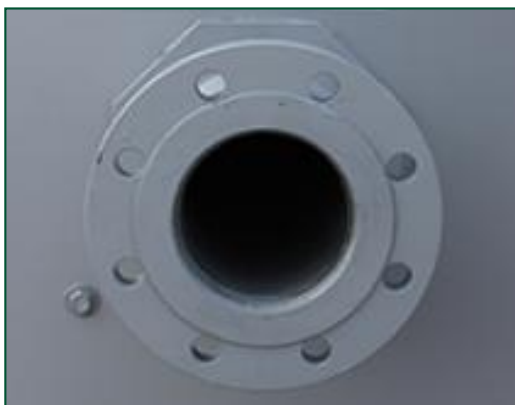

Flanges

Flanges facilitate **pipng connections** on-site.



Water treatment equipment

Devices to control water treatment are needed to ensure proper **condenser water care**. Not only does this help protect the components, controlling corrosion, scaling and fouling, it also avoids the proliferation of harmful bacteria, including **legionella**, in the recirculating water.



Filter

Separators and media filters efficiently **remove suspended solids** in the recirculating water, reducing system cleaning costs and optimizing water treatment results. Filtration helps you keep the recirculating water clean.



Clean out port

Clean out port **makes it easy to eliminate silt and sludge** from the condenser basin when cleaning and flushing the sump.



Steel drift eliminators

Steel drift eliminators are more **robust** than plastic alternatives.



Sump sweeper piping

Sump sweeper piping **prevents sediment collecting in the cold water basin** of the unit. A complete piping system, including nozzles, are installed in the basin of the tower **for connection to side stream filtration** equipment.



Special needs?

Refrigerant condensers

Special needs?

Our ongoing [R&D](#) investment helps BAC offer you a complete set of solutions **for Polairis evaporative condensers that meet your needs**. Plus, we also cater for extra requirements such as:

Plume control

Tap into abundant BAC plume control experience. For the Polairis line, we offer [desuperheaters](#) with **reduced plume and extended dry operation periods**.

Check out our [BAC plume visualization software](#) for insight into **how your cooling equipment will plume** before installation. Helping you choose the best and most effective plume abatement solution.

Water savings

You need water for evaporative cooling. At BAC, however, we offer acclaimed and advanced water saving technologies. Helping in this aim are:

- [Electric water level control package](#)
- [Water treatment equipment](#)
- [Desuperheater](#)



Enhanced hygiene and water care

Water circulates in evaporative condensers and it is important to avoid excessive accumulation of dissolved solids. The following options help keep your condenser clean:

- [Remote sump connection](#)
- [Water treatment equipment](#)
- [Clean out port](#)
- [Filters](#)

To control biological growth and scale formation, the water quality of the circulated water should be checked regularly. [Water quality guidelines](#) can be found in the [Knowledge center](#) of the website.

Year-round reliable operation

Inspect and maintain your condenser and protect it against extreme weather for year-round reliability. The options below help keep your condenser running smoothly and reliably and facilitate maintenance.

- [Remote sump connection](#)
- [Water treatment equipment](#)
- [Clean out port](#)
- [Filters](#)
- [Electric water level control package](#)
- [Desuperheater](#)

Do you too want to benefit from the above solutions? Contact your [local BAC representative](#) for more information.



PLC2 XXX-0403E-H

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant in- and outlet connection sizes are ND100. Consult your local BAC Balticare representative for locations. Refrigerant connections are closed and coils are filled with an inert gas.
2. Unit height is indicative. For precise value refer to certified print.
3. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted. Operating weights shown in the tables is based on total unit weight, weight of refrigerant operating charge and basin filled to overflow level.
4. Drawings show the standard right hand arrangement (air inlet side on the right when facing the connection end). Left hand arrangement can be supplied upon request.

Last update: 24/11/2021

PLC2 XXX-0403E-H

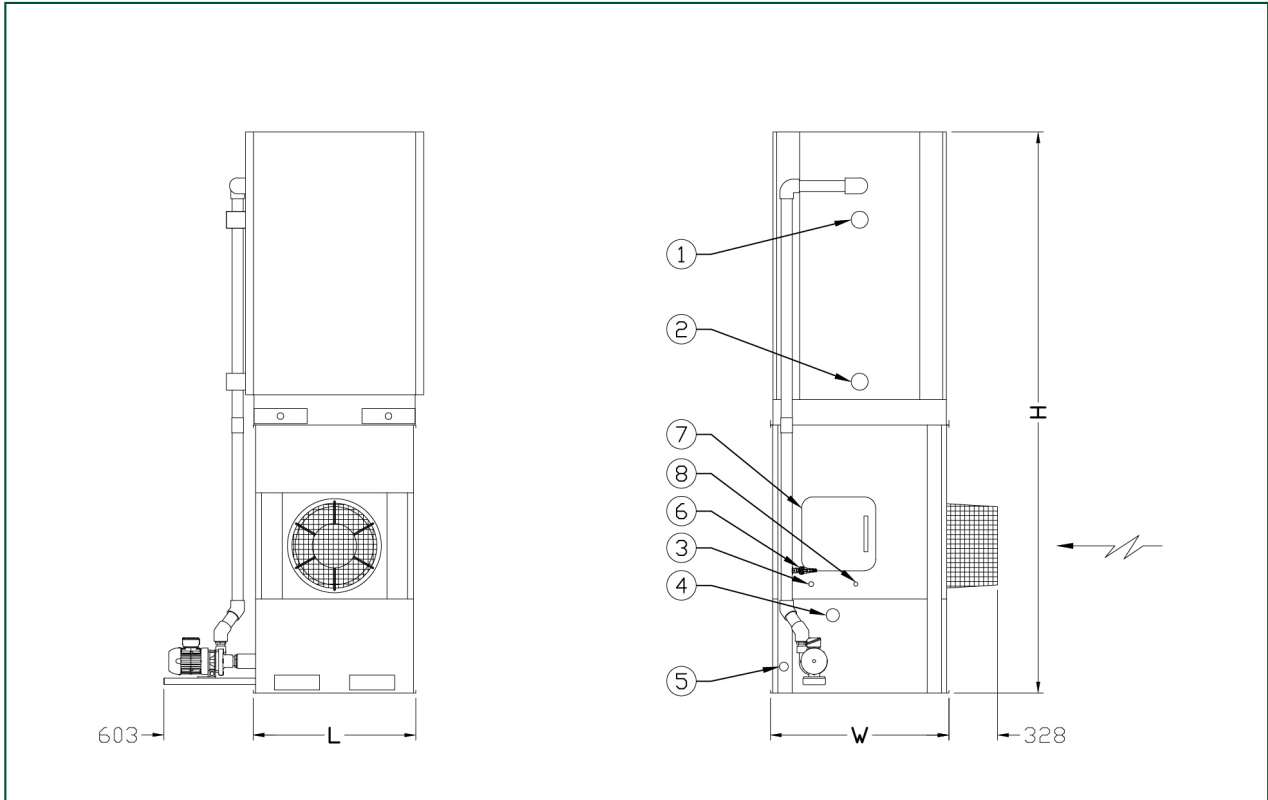

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up ND40; 4. Overflow ND80; 5. Drain ND50; 6. Bleed ND25; 7. Treated Water In ND20; 8. Access door.



Model	Weights (kg)			Dimensions (mm)			Air Flow (m ³ /s)	Fan Motor (kW)	Water Flow (l/s)	Pump Motor (kW)	R717 charge (kg)
	Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H					
PLC2 028-04 03E-H	1047	794	429	1099	1207	3070	5.0	(1x) 4.05	2.6	(1x) 0.37	11.0
PLC2 035-04 03E-H	1132	874	444	1099	1207	3305	4.7	(1x) 4.05	2.6	(1x) 0.37	16.0
PLC2 044-04 03E-H	1210	948	519	1099	1207	3540	4.5	(1x) 4.05	2.6	(1x) 0.37	20.0
PLC2 049-04 03E-H	1289	1022	593	1099	1207	3775	4.3	(1x) 4.05	2.6	(1x) 0.37	25.0
PLC2 051-04 03E-H	1339	1068	638	1099	1207	3790	4.2	(1x) 4.05	2.6	(1x) 0.37	29.0



PLC2 XXX-0406E-K

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant in- and outlet connection sizes are ND100. Consult your local BAC Balticare representative for locations. Refrigerant connections are closed and coils are filled with an inert gas.
2. Unit height is indicative. For precise value refer to certified print.
3. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted. Operating weights shown in the tables is based on total unit weight, weight of refrigerant operating charge and basin filled to overflow level.
4. Drawings show the standard right hand arrangement (air inlet side on the right when facing the connection end). Left hand arrangement can be supplied upon request.

Last update: 24/11/2021

PLC2 XXX-0406E-K

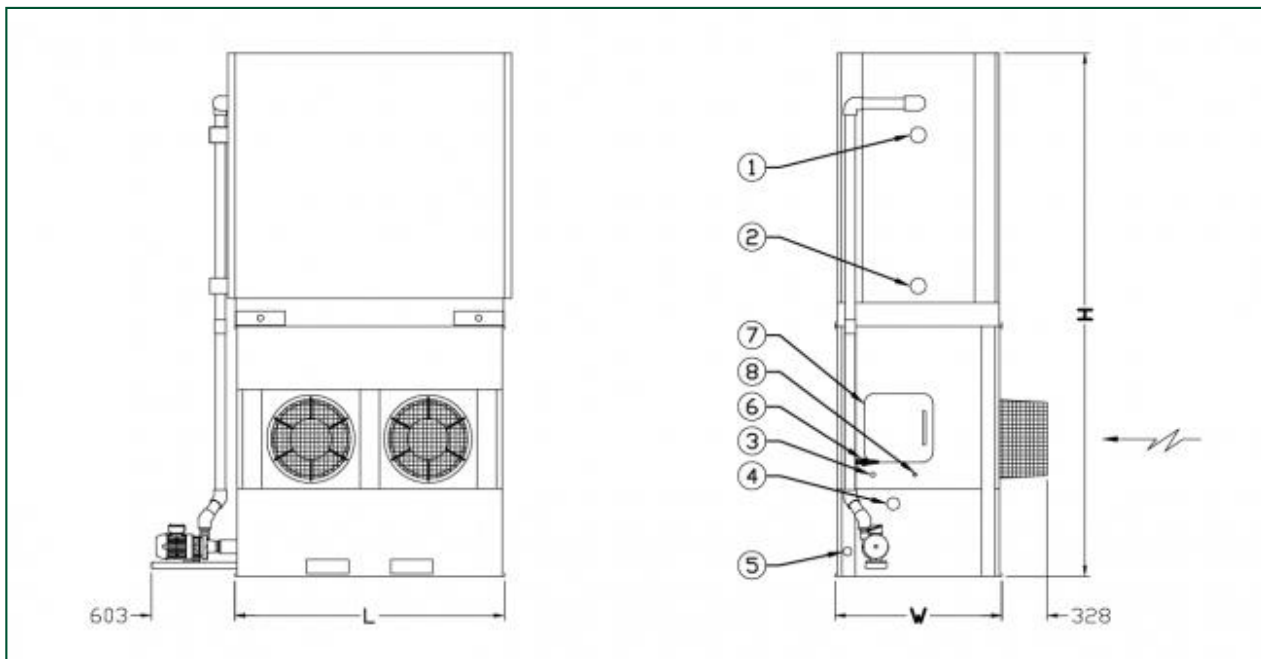

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up ND40; 4. Overflow ND80; 5. Drain ND50; 6. Bleed ND25; 7. Treated Water In ND20; 8. Access door.



Model	Weights (kg)			Dimensions (mm)			Air Flow (m ³ /s)	Fan Motor (kW)	Water Flow (l/s)	Pump Motor (kW)	R717 charge (kg)
	Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H					
PLC2 065-04 06E-K	1816	1236	684	1950	1207	3070	9.8	(2x) 4.05	6.4	(1x) 0.75	20.0
PLC2 079-04 06E-K	1949	1361	684	1950	1207	3305	9.3	(2x) 4.05	6.4	(1x) 0.75	28.0
PLC2 092-04 06E-K	2077	1480	796	1950	1207	3540	8.9	(2x) 4.05	6.4	(1x) 0.75	37.0
PLC2 0102-0 406E-K	2205	1599	915	1950	1207	3775	8.6	(2x) 4.05	6.4	(1x) 0.75	46.0
PLC2 0107-0 406E-K	2300	1685	1001	1950	1207	3790	8.3	(2x) 4.05	6.4	(1x) 0.75	54.0

PLC2 XXX-0409E-L

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant in- and outlet connection sizes are ND100. Consult your local BAC Balticare representative for locations. Refrigerant connections are closed and coils are filled with an inert gas.
2. Unit height is indicative. For precise value refer to certified print.
3. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted. Operating weights shown in the tables is based on total unit weight, weight of refrigerant operating charge and basin filled to overflow level.
4. Drawings show the standard right hand arrangement (air inlet side on the right when facing the connection end). Left hand arrangement can be supplied upon request.

Last update: 24/11/2021

PLC2 XXX-0409E-L

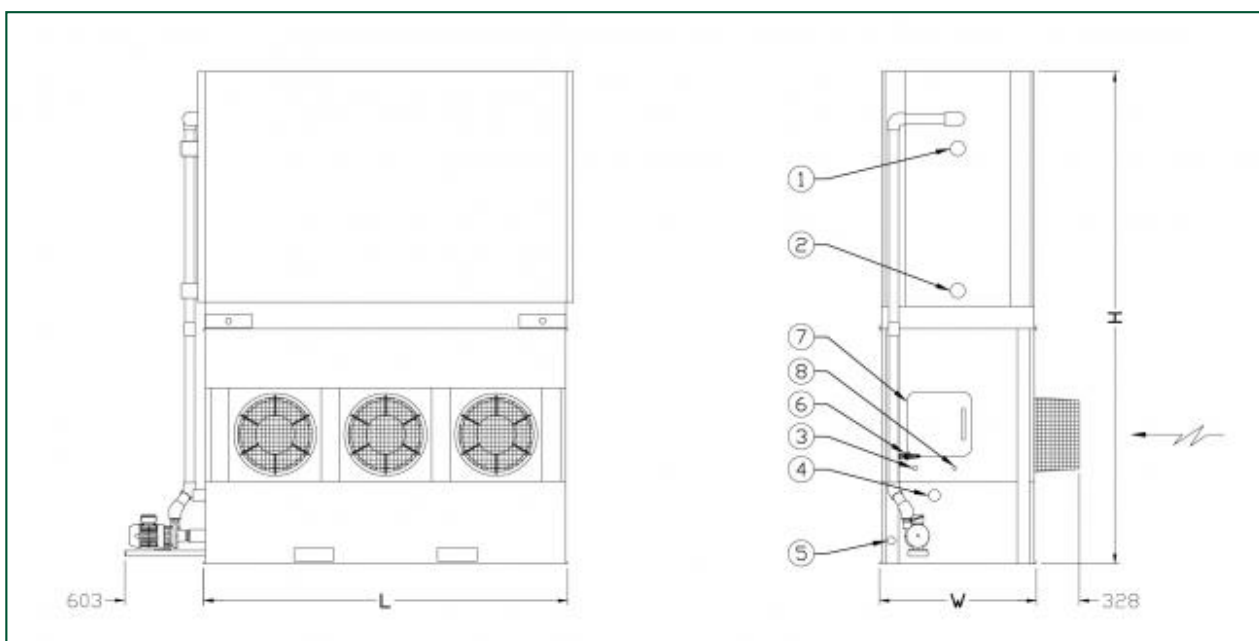



1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up ND40; 4. Overflow ND80; 5. Drain ND50; 6. Bleed ND25; 7. Treated Water In ND20; 8. Access door.



Model	Weights (kg)			Dimensions (mm)			Air Flow (m ³ /s)	Fan Motor (kW)	Water Flow (l/s)	Pump Motor (kW)	R717 charge (kg)
	Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H					
PLC2 093-04 09E-L	2462	1617	898	2799	1207	3070	14.7	(3x) 4.05	8.9	(1x) 1.5	27.0
PLC2 0117-0 409E-L	2645	1787	898	2799	1207	3305	14.0	(3x) 4.05	8.9	(1x) 1.5	40.0
PLC2 0138-0 409E-L	2822	1952	1054	2799	1207	3540	13.4	(3x) 4.05	8.9	(1x) 1.5	52.0
PLC2 0158-0 409E-L	3003	2120	1222	2799	1207	3775	12.9	(3x) 4.05	8.9	(1x) 1.5	64.0
PLC2 0164-0 409E-L	3134	2239	1340	2799	1207	3790	12.5	(3x) 4.05	8.9	(1x) 1.5	77.0



PLC2 XXX-0512E-M

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant in- and outlet connection sizes are ND100. Consult your local BAC Balticare representative for locations. Refrigerant connections are closed and coils are filled with an inert gas.
2. Unit height is indicative. For precise value refer to certified print.
3. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted. Operating weights shown in the tables is based on total unit weight, weight of refrigerant operating charge and basin filled to overflow level.
4. Drawings show the standard right hand arrangement (air inlet side on the right when facing the connection end). Left hand arrangement can be supplied upon request.

Last update: 24/11/2021

PLC2 XXX-0512E-M

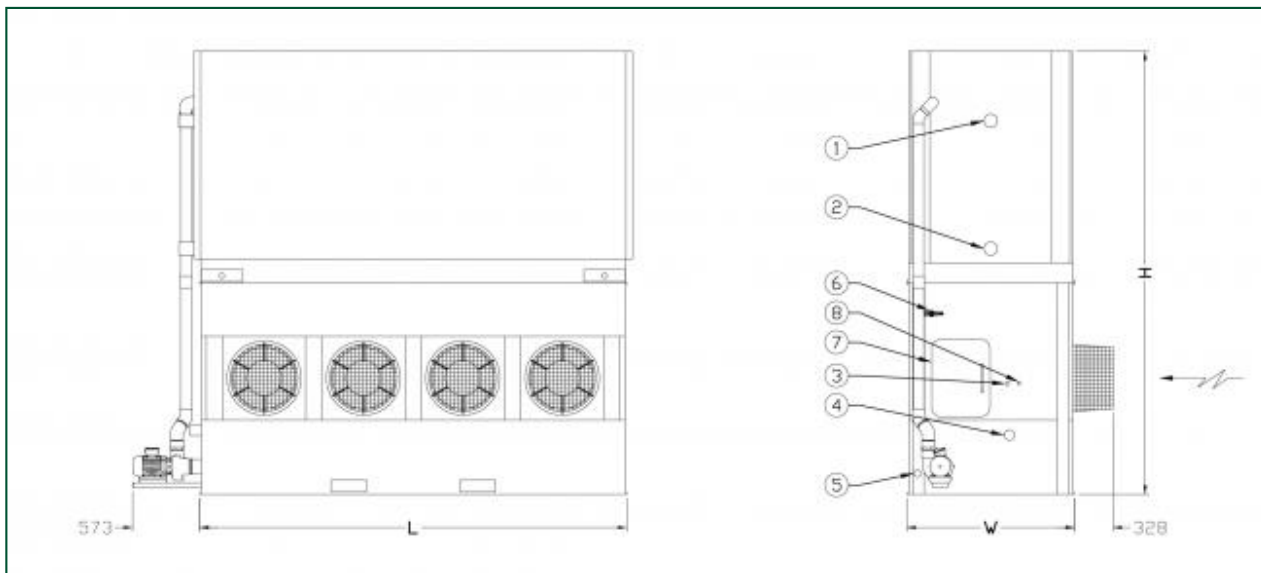

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up ND40; 4. Overflow ND80; 5. Drain ND50; 6. Bleed ND25; 7. Treated water in ND20; 8. Access door.



Model	Weights (kg)			Dimensions (mm)			Air Flow (m ³ /s)	Fan Motor (kW)	Water Flow (l/s)	Pump Motor (kW)	R717 charge (kg)
	Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H					
PLC2 0182-0 512E-M	3336	2173	1143	3651	1435	3070	21.6	(4x) 4.05	14.4	(1x) 2.2	43.0
PLC2 0200-0 512E-M	3607	2425	1282	3651	1435	3305	20.7	(4x) 4.05	14.4	(1x) 2.2	63.0
PLC2 0219-0 512E-M	3869	2667	1524	3651	1435	3540	20.0	(4x) 4.05	14.4	(1x) 2.2	83.0
PLC2 0231-0 512E-M	4133	2911	1768	3651	1435	3775	19.3	(4x) 4.05	14.4	(1x) 2.2	103.0
PLC2 0247-0 512E-M	4340	3098	1954	3651	1435	3790	18.8	(4x) 4.05	14.4	(1x) 2.2	123.0
PLC2 0255-0 512E-M	4592	3330	2187	3651	1435	3980	18.3	(4x) 4.05	14.4	(1x) 2.2	143.0



PLC2 xxx-0812E-K

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant in- and outlet connection sizes are ND100. Consult your local BAC Balticare representative for locations. Refrigerant connections are closed and coils are filled with an inert gas.
2. Unit height is indicative. For precise value refer to certified print.
3. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted. Operating weights shown in the tables is based on total unit weight, weight of refrigerant operating charge and basin filled to overflow level.
4. Drawings show the standard right hand arrangement (air inlet side on the right when facing the connection end). Left hand arrangement can be supplied upon request.

Last update: 01/06/2023

PLC2 xxx-0812E-K

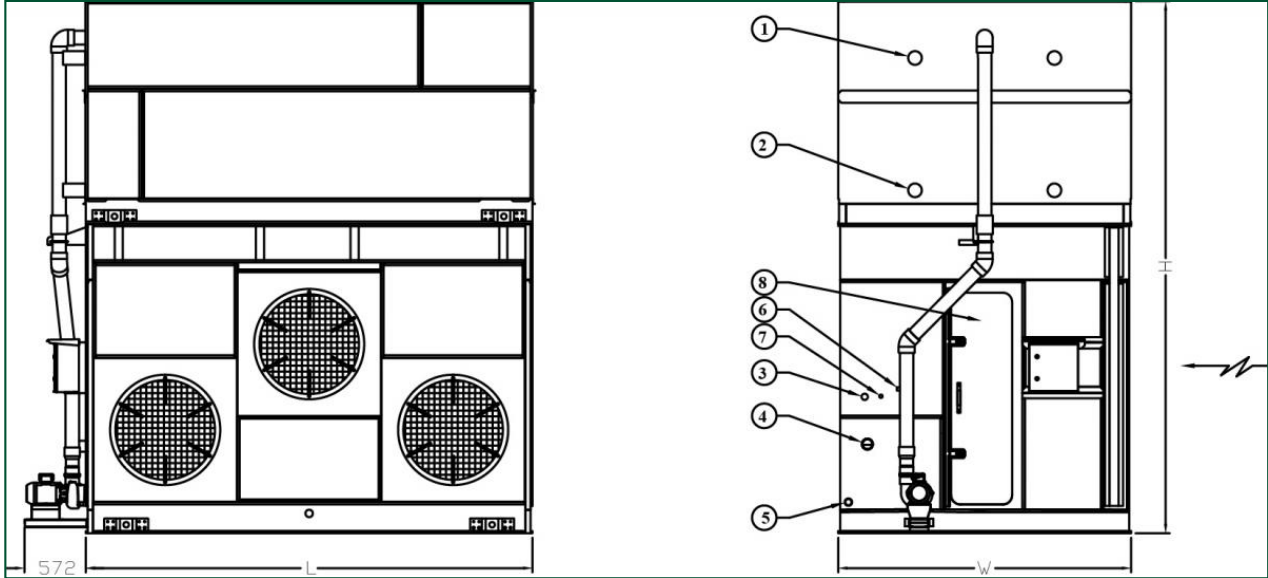

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up ND40; 4. Overflow ND80; 5. Drain ND50; 6. Bleed ND25; 7. Treated Water In ND20; 8. Access door.



Model	Weights (kg)			Dimensions (mm)			Air Flow (m ³ /s)	Fan Motor (kW)	Water Flow (l/s)	Pump Motor (kW)	R717 charge (kg)
	Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H					
PLC2 0248-0 812E-K	6141	4786	2550	3651	2469	4353	31.65	(3x) 7.0	21.6	(1x) 2.2	100.0
PLC2 0276-0 812E-K	6682	5296	3060	3651	2469	4353	30.23	(3x) 7.0	21.6	(1x) 2.2	132.0
PLC2 0305-0 812E-K	7350	5932	3696	3651	2469	4734	28.81	(3x) 7.0	21.6	(1x) 2.2	164.0
PLC2 0330-0 812E-K	7892	6442	4206	3651	2469	4734	27.4	(3x) 7.0	21.6	(1x) 2.2	196.0



PLC2 xxx-0818E-K

Refrigerant condensers

Engineering data


REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant in- and outlet connection sizes are ND100. Consult your local BAC Balticare representative for locations. Refrigerant connections are closed and coils are filled with an inert gas.
2. Unit height is indicative. For precise value refer to certified print.
3. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted. Operating weights shown in the tables is based on total unit weight, weight of refrigerant operating charge and basin filled to overflow level.
4. Drawings show the standard right hand arrangement (air inlet side on the right when facing the connection end). Left hand arrangement can be supplied upon request.

Last update: 01/06/2023

PLC2 xxx-0818E-K

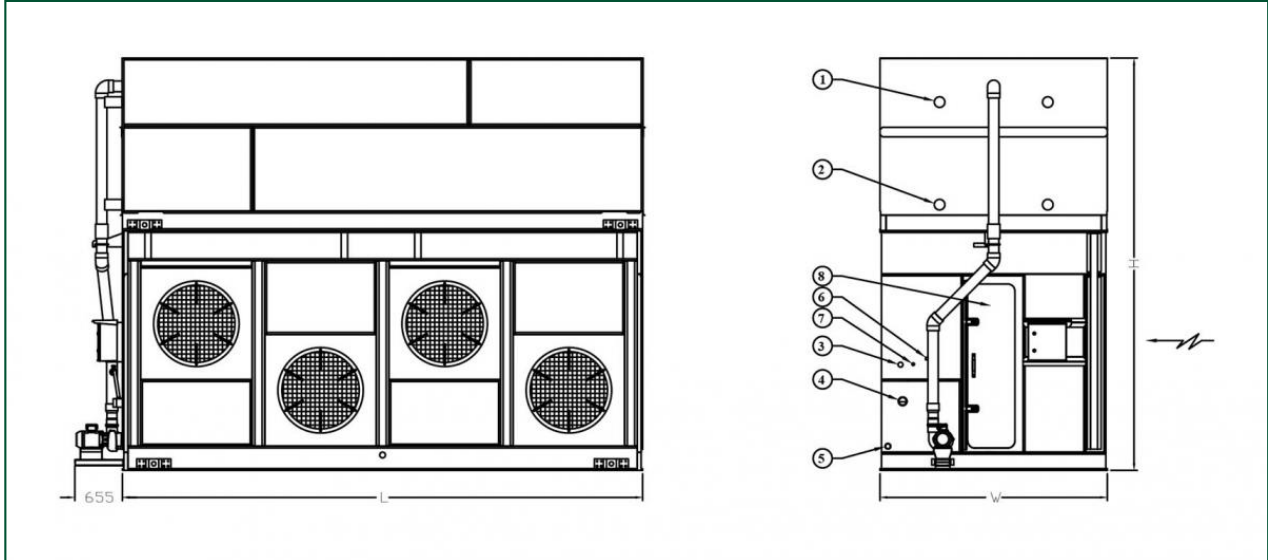

1. Refrigerant in ND100; 2. Refrigerant out ND100; 3. Make up ND40; 4. Overflow ND80; 5. Drain ND50; 6. Bleed ND25; 7. Treated water in ND20; 8. Access door.



Model	Weights (kg)			Dimensions (mm)			Air Flow (m ³ /s)	Fan Motor (kW)	Water Flow (l/s)	Pump Motor (kW)	R717 charge (kg)
	Oper. Weight (kg)	Ship. Weight(kg)	Heaviest Section (kg)	L	W	H					
PLC2 0350-0 818E-K	8982	6930	3644	5480	2469	4353	44.92	(4x) 7.0	30.6	(1x) 4.0	150.0
PLC2 0392-0 818E-K	9797	7697	4411	5480	2469	4353	43.03	(4x) 7.0	30.6	(1x) 4.0	198.0
PLC2 0434-0 818E-K	10774	8626	5340	5480	2469	4734	41.14	(4x) 7.0	30.6	(1x) 4.0	246.0
PLC2 0458-0 818E-K	11588	9392	6106	5480	2469	4734	39.25	(4x) 7.0	30.6	(1x) 4.0	294.0



Sound attenuation

Refrigerant condensers

Engineering data

REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

General notes

1. Standard refrigerant in- and outlet connection sizes are ND100. Consult your local BAC Balticare representative for locations. Refrigerant connections are closed and coils are filled with an inert gas.
2. Unit height is indicative. For precise value refer to certified print.
3. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted. Operating weights shown in the tables is based on total unit weight, weight of refrigerant operating charge and basin filled to overflow level.
4. Drawings show the standard right hand arrangement (air inlet side on the right when facing the connection end). Left hand arrangement can be supplied upon request.

Last update: 01/06/2023

Sound attenuation



1. Access door.



Model	Unit + Atten # pieces shipped	# Access Doors		Dimensions (mm)					Weights (kg)			
		Discharge	Intake	W2	H1	W1	L1	L2	Intake	Solid Bottom	Discharge	Total
PLC XXXX- 0812E- K	4	1	2	3639	2357	2394	3651	3651	537		670	1207
PLC XXXX- 0818E- K	4	1	2	3639	2357	2394	5480	5480	805		951	1756